
# **OVERVIEW**

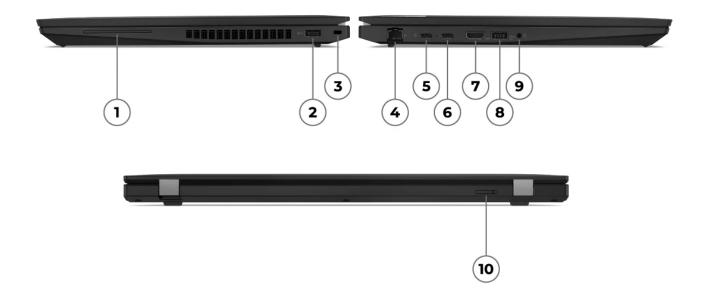

1. Smart card reader *	6. USB-C 3.2 Gen 2
2. USB 3.2 Gen 1	7. HDMI
3. Kensington Nano Security Slot	8. USB 3.2 Gen 1 (Always On)
4. Ethernet (RJ-45)	9. Headphone / microphone combo jack (3.5mm)
5. USB4 40Gbps	10. Nano-SIM card slot *

Notes:

• Items with \* are only available on selected models

# PERFORMANCE

## **Processor**

## Processor Family

AMD Ryzen<sup>™</sup> 5 / 7 Processor

### Processor\*\*

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics
AMD Ryzen 5 PRO 7540U	6	12	3.2GHz	4.9GHz	6MB L2 / 16MB L3	AMD Radeon™ 740M
AMD Ryzen 7 PRO 7840U	8	16	3.3GHz	5.1GHz	8MB L2 / 16MB L3	AMD Radeon 780M

# **Operating System**

## **Operating System**\*\*

- Linux<sup>[1]</sup>
- Ubuntu Linux<sup>[2]</sup>
- Windows® 11 DG Windows 10 Pro 64
- Windows 11 Home
- Windows 11 Home Single Language
- Windows 11 ProNo operating system

# Notes:

[1], [2] Some features may not be supported on the system with Linux preload, including but not limited to Intel® RST RAID, MIPI computer vision camera, WWAN, Human Presence Detection, etc.

# Graphics

## Graphics\*\*

Graphics	Туре	Memory	Key Features
AMD Radeon 740M	Integrated	Shared	DirectX® 12
AMD Radeon 780M	Integrated	Shared	DirectX 12

# **Monitor Support**

#### **Monitor Support**

Supports up to 4 independent displays (native display and 3 external monitors via HDMI®, USB-C® or USB4®)

• HDMI supports up to 4K@60Hz

• USB-C supports up to 4K@60Hz (4 displays output), 5K@60Hz (3 displays output) or 5K@120Hz (up to 2 displays output)

• USB4 supports up to 4K@60Hz (4 displays output), 5K@60Hz (3 displays output) or 5K@120Hz (up to 2 displays output)

# Chipset

## Chipset

AMD SoC (System on Chip) platform

# Memory

## Max Memory

- 8GB soldered memory, not upgradable
- 16GB soldered memory, not upgradable
- 32GB soldered memory, not upgradable

#### Memory Slots

Memory soldered to systemboard, no slots, dual-channel

#### Memory Type\*\*

- LPDDR5-6400 (8GB)
- LPDDR5x-6400 (16GB or 32GB)[1]

Notes:

Lenovo

[1] Installed memory is actually 7500MHz, but run at 6400MHz due to platform limitation.

# Storage

### Storage Support<sup>[1]</sup>

One drive, up to 2TB M.2 2280 SSD

## Storage Slot

One M.2 2280 PCIe<sup>®</sup> 4.0 x4 slot

### Storage Type\*\*

Disk Type	Interface	Offering	Security
M.2 2280 SSD	PCIe NVMe <sup>®</sup> , PCIe 4.0 x4	256GB / 512GB / 1TB	Opal 2.0
M.2 2280 SSD	PCIe NVMe, PCIe 4.0 x4 Performance	512GB / 1TB / 2TB	Opal 2.0

Notes:

[1] The storage capacity supported is based on the test results with current Lenovo<sup>®</sup> storage offerings.

# **Removable Storage**

#### **Card Reader**

No card reader

# **Multi-Media**

#### Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

#### Speakers

Stereo speakers, 2W x2, Dolby<sup>®</sup> Audio™

#### Microphone

- Dual-microphone array, 360° far-field, Dolby Voice
- No microphone<sup>[1]</sup>

#### Camera\*

- 5.0MP + IR discrete, with privacy shutter, fixed focus
- FHD 1080p + IR hybrid, with privacy shutter, fixed focus
- HD 720p, with privacy shutter, fixed focus
- No camera<sup>[2]</sup>

## Notes:

[1] No microphone is for special bid only.

[2] No camera is for special bid only.

# Battery

#### Battery\*\*

- Integrated Li-Polymer 52.5Wh battery, supports Rapid Charge (charge up to 80% in 1hr)
- Integrated Li-Polymer 86Wh battery

#### Battery Life<sup>[1]</sup>

Configuration 1 (max battery life) MobileMark® 25: up to 21.6 hr with 701 performance score @250nits JEITA 2.0: up to 30.8 hr @150nits Local video playback: up to 26.1 hr @150nits

Alternate configuration 2 MobileMark 25: up to 15.3 hr with 654 performance score @250nits JEITA 2.0: up to 23.0 hr @150nits Local video playback: up to 21.2 hr @150nits

Alternate configuration 3 MobileMark 25: up to 5.7 hr with 640 performance score @250nits JEITA 2.0: up to 9.2 hr @150nits Local video playback: up to 8.6 hr @150nits

Lenovo

Notes:

[1] Configuration 1 (max battery life): WUXGA Low Power (non-touch), AMD Ryzen 7 PRO 7840U, 16GB LPDDR5x, Win 11, 86Wh battery, best power efficiency power mode

Alternate configuration 2: WUXGA (touch), AMD Ryzen 5 PRO 7540U, 16GB LPDDR5x, Win 11, 86Wh battery, best power efficiency power mode

Alternate configuration 3: WQUXGA OLED (non-touch), AMD Ryzen 5 PRO 7540U, 32GB LPDDR5x, Win 11, 52.5Wh battery, best power efficiency power mode

All battery life claims are approximate maximum and based on results using <u>MobileMark 2018</u>, <u>MobileMark 25</u>, JEITA 2.0, continuous 1080p local video playback (using default Media Player in Fullscreen mode with 150nits brightness and default volume level), or Google Power Load Test (PLT) battery-life benchmark tests.

Actual battery life will vary depending on many factors such as product configuration, software, wireless functionality, power management settings, and screen brightness.

The maximum capacity of the battery will decrease with time, ambient temperature and use.

Refer to Microsoft<sup>®</sup> link for more information about the Windows Performance power slider.

# **Power Adapter**

#### Power Adapter\*\*[1]

- 65W USB-C (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 100W USB-C slim (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- No power adapter<sup>[2]</sup>

#### Notes:

[1] AC adapter offerings depend on the country.

[2] No power adapter is for special bid only.

# DESIGN

## **Display**

#### Display\*\*

Size	Resolution	Touch	Туре	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle (L/R/U/D)	Key Features
16″	WUXGA (1920x1200)	None	IPS <sup>[1]</sup>	300nits	Anti- glare	16:10	800:1	45% NTSC	85°/85°/85°/85°	
16″	WUXGA (1920x1200)	Multi- touch	IPS <sup>[2]</sup>	300nits	Anti- glare	16:10	800:1	45% NTSC	85°/85°/85°/85°	
16″	WUXGA (1920x1200)	None	IPS <sup>[3]</sup>	400nits	Anti- glare	16:10	1000:1	100% sRGB	85°/85°/85°/85°	Low power, Eyesafe® Certified 2.0
16″	WUXGA (1920x1200)	Multi- touch	IPS <sup>[4]</sup>	500nits	Anti- glare	16:10	1000:1	100% sRGB	85°/85°/85°/85°	ThinkPad® Privacy Guard
16″	WQUXGA (3840x2400)	None	OLED	400nits	Anti- reflection, anti- smudge	16:10	100,000:1	100% DCI- P3	87.5°/87.5°/87.5°/87.5°	DisplayHDR <sup>™</sup> True Black 500, Dolby Vision <sup>™</sup> , Eyesafe Certified 2.0

#### Touchscreen

• On-cell multi-touch, supports 10-point touch

• Non-touch

Notes:

[1], [2], [3], [4] IPS (in-plane switching) technology may refer to IPS, PLS, ADS, AHVA, AAS.

# Input Device

## Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls, numeric keypad

### Keyboard Backlight

- LED backlight
- Non-backlight

## UltraNav™

TrackPoint® pointing device and glass-like Mylar® surface multi-touch touchpad, 67.7 x 115 mm (2.67 x 4.53 inches)

# Mechanical

#### Dimensions (WxDxH)<sup>[1]</sup>

361.9 x 255.5 x 20.5 mm (14.25 x 10.06 x 0.81 inches)

#### Weight<sup>[2]</sup>

Models	Weight
Models with thunder black cover and 52.5Wh battery	Starting at 1.71 kg (3.76 lbs)
Models with storm grey cover and 52.5Wh battery	Starting at 1.75 kg (3.84 lbs)
Models with thunder black cover and 86Wh battery	Starting at 1.83 kg (4.02 lbs)
Models with storm grey cover and 86Wh battery	Starting at 1.85 kg (4.08 lbs)

#### Case Color\*\*

- Storm grey
- Thunder black

#### Case Material\*\*

- Storm grey models: aluminium (top), aluminium (bottom)
- Thunder black models: carbon fiber hybrid (top), PPS (bottom)

#### Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

# CONNECTIVITY

## Network

#### Ethernet

Gigabit Ethernet, Realtek RTL8111EPV, 1x RJ-45, supports Wake-on-LAN

#### WLAN + Bluetooth®\*\*[1]

- MediaTek Wi-Fi<sup>®</sup> 6E RZ616, 802.11ax 2x2 Wi-Fi + Bluetooth 5.3
- Qualcomm<sup>®</sup> Wi-Fi 6E NFA725A, 802.11ax 2x2 Wi-Fi + Bluetooth 5.3

#### WWAN\*\*

- Wireless WAN upgradable to 4G (with antenna ready)
- Quectel EM05-G, 4G LTE CAT4, M.2 card, with embedded eSIM functionality
- Fibocom L860-GL-16, 4G LTE CAT16, M.2 card, with embedded eSIM functionality
- No support

#### SIM Card

No physical SIM card inbox

#### NFC

- Near Field Communication
- No support

Lenovo

#### Notes:

[1] Wi-Fi 6E full features might be limited by country-level restrictions.

Wi-Fi 6E is only enabled on Windows 11 and operates as Wi-Fi 6 with Windows 10.

6GHz Wi-Fi 6E operation is dependent on the support of the operating system, routers/APs/Gateways that support Wi-Fi 6E, and the regional regulatory certifications & spectrum allocation.

Bluetooth 5.3 operation requires Windows 11. For more information please see <u>General Bluetooth Support Information on</u> <u>Microsoft</u>.

## **Ports**<sup>III</sup>

#### **Standard Ports**

- 1x USB 3.2 Gen 1
- 1x USB 3.2 Gen 1 (Always On)
- 1x USB-C 3.2 Gen 2 (support data transfer, Power Delivery 3.0 and DisplayPort<sup>™</sup> 1.4a)
- 1x USB4 40Gbps (support data transfer, Power Delivery 3.0 and DisplayPort 1.4a)
- 1x HDMI 2.1, up to 4K/60Hz
- 1x Headphone / microphone combo jack (3.5mm)
- 1x Ethernet (RJ-45)

#### **Optional Ports**\*\*\*

- 1x Smart card reader
- 1x Nano-SIM card slot (WWAN support models)

#### Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

# Docking

#### Docking

Various docking solutions supported via USB-C. For more compatible docking solutions, please visit <u>Docking for ThinkPad T16 Gen 2 (AMD)</u>

# Monitor Cable

#### Monitor Cable\*\*\*

- Lenovo HDMI to VGA Monitor Adapter
- Lenovo USB-C to VGA Adapter
- Lenovo USB-C to DisplayPort Adapter
- No monitor cable

# **SECURITY & PRIVACY**

## Security

#### **Security Chip**

Discrete TPM 2.0 (TCG certified, FIPS 140-2 certified) and Microsoft Pluton TPM 2.0, one enabled at one time

#### Physical Locks

Kensington<sup>®</sup> Nano Security Slot<sup>™</sup>, 2.5 x 6 mm

#### Smart Card Reader

- Smart card reader
- No smart card reader

#### Fingerprint Reader<sup>[1]</sup>

- Touch style fingerprint reader integrated in power button, match-on-chip
- No fingerprint reader

#### **BIOS Security**

- Power-on password
- Supervisor password
- System management password
- NVMe password
- FIDO (Fast Identity Online) authentication
- Certificate based BIOS authentication
- Self-healing BIOS

#### Other Security

- (Optional) Camera privacy shutter
- (Optional) IR camera for Windows Hello
- (Optional) Privacy Guard with Privacy Alert
- Glance by Mirametrix<sup>®</sup>
- Ultrasonic Human Presence Detection (IR camera models)

Notes:

[1] Fingerprint reader is standard on storm grey models and optional on thunder black models.

# MANAGEABILITY

## **System Management**

## System Management

DASH

# SERVICE

## Warranty

#### Base Warranty\*\*

- 1-year courier or carry-in service
- 1-year courier or carry-in with 2-year system board service (Korea only)
- 1-year limited onsite service
- 3-year (1-yr battery) courier or carry-in service
- 3-year (1-yr battery) limited onsite service
- No base warranty<sup>[1]</sup>

Notes:

[1] No base warranty is for special bid only.

# **ENVIRONMENTAL**

# **Operating Environment**

#### Temperature<sup>[1]</sup>

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping package: -20°C (-4°F ) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

## Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

#### Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

[1] When you charge the battery, its temperature must be no lower than 10°C (50°F).

# ACCESSORIES

## **Bundled Accessories**

## Bundled Accessories<sup>[1]</sup>

- Lenovo USB-C to Ethernet Adapter (1Gbps)
- None

Notes:

[1] For more compatible accessory solutions, please visit Accessories for ThinkPad T16 Gen 2 (AMD).

# CERTIFICATIONS

# **Green Certifications**<sup>III</sup>

## **Green Certifications**

- (Optional) ENERGY STAR<sup>®</sup> 8.0
- (Optional) EPEAT<sup>™</sup> Gold Registered<sup>[2]</sup>
- ErP Lot 6/26
- RoHS compliant
- TCO Certified 9.0

#### Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration.

[2] EPEAT is registered where applicable, please see https://www.epeat.net for registration status by country.

# **Other Certifications**

## Mil-Spec Test

MIL-STD-810H military test passed

## **Other Certifications**


(Optional) Eyesafe Certified 2.0

- Feature with \*\* means that only one offering listed under the feature is configured on selected models.
- Feature with \*\*\* means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.













AMD



AMD